


100742N CRV 608 2-LEVER ON-OFF VALVE

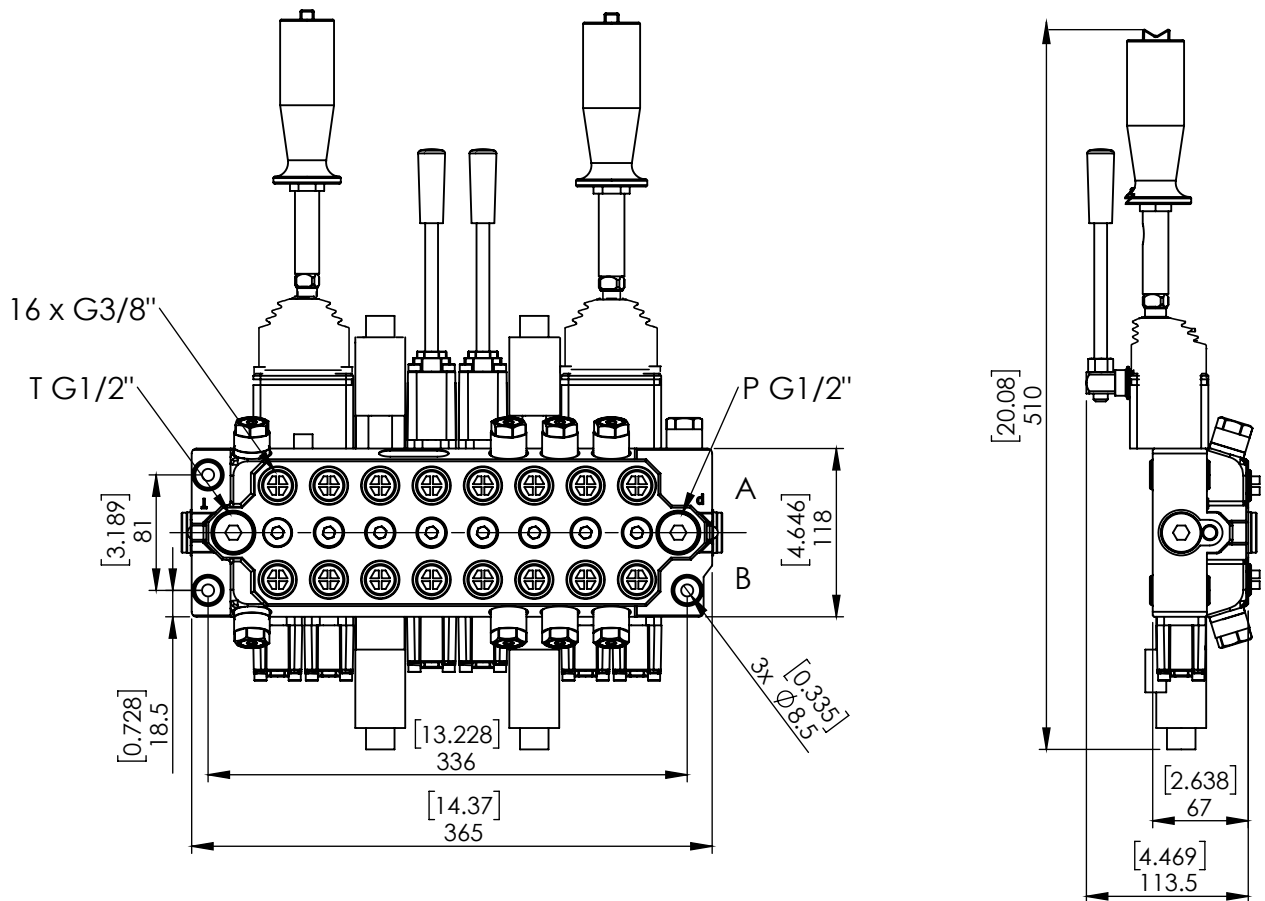

Max pressure	250 bar
Max flow	60 LPM
Max return line pressure	10 bar
Max oil temperature	+60 C
Min oil temperature	-20 C
Ports pressure in and out	G 1/2"
Ports (work)	G 3/8"
Weight	22 kg
Electrical connections	
12 Volt DC	
Fuse	8 AMP
Minimum requirement cabel	8 mm ²