



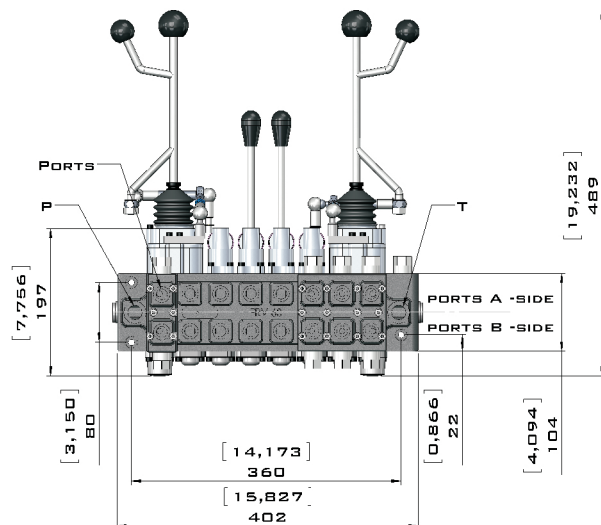

MAXIMUM FLOW 60 L/MIN
MAX OPERATION PRESSURE 250 BAR
MAX TANKLINE PRESSURE 10 BAR
OPERATION TEMPERATURE -20 °C - +60 °C
WEIGHT 22-26 KG

AVAILABLE FOR OPEN AND CLOSED
HYDRAULIC SYSTEMS.

DATA




MULTILEVER CONTROL

TYPE	SLEWING	MAIN BOOM	SECOND BOOM	ROTATOR	GRAPPLE	EXTENSION BOOM	LEG	LEG
FRV 60/6	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/7	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/8	I I	I I	I I	I I	I I	I I	I I	I I



2-LEVER CONTROL


TYPE	SLEWING(F)	SECOND BOOM(F)	EXTENSION BOOM	LEG	LEG	GRAPPLE	ROTATOR	MAIN BOOM(F)
FRV 60/6	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/7	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/8	I I	I I	I I	I I	I I	I I	I I	I I

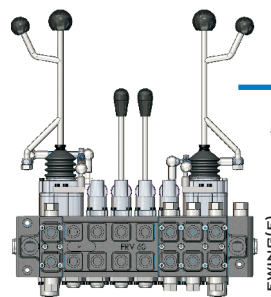

2-LEVER + CONTROL

TYPE	SLEWING(F)	SECOND BOOM(F)	EXTENSION BOOM	LEG	LEG	GRAPPLE	ROTATOR	MAIN BOOM(F)
FRV 60/6	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/7	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/8	I I	I I	I I	I I	I I	I I	I I	I I


H HIGH SECTION, SHOCK VALVES IF NEEDED
L LOW SECTION, NO SHOCK VALVES
(F) FLOAT POSITION IF NEEDED
P PLUGGED



2-LEVER ON-OFF CONTROL

TYPE	SLEWING(F)	SECOND BOOM(F)	EXTENSION BOOM	LEG	LEG	GRAPPLE	ROTATOR	MAIN BOOM(F)
FRV 60/6	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/7	I I	I I	I I	I I	I I	I I	I I	I I
FRV 60/8	I I	I I	I I	I I	I I	I I	I I	I I

ELECTRICITY
VOLTAGE 12 VDC/24 VDC
CURRENT (KEEPING) 8 A
CURRENT (PULL MAX) 16 A
FUSE 20 A
ELEC CABLE MIN AREA 4 MM²

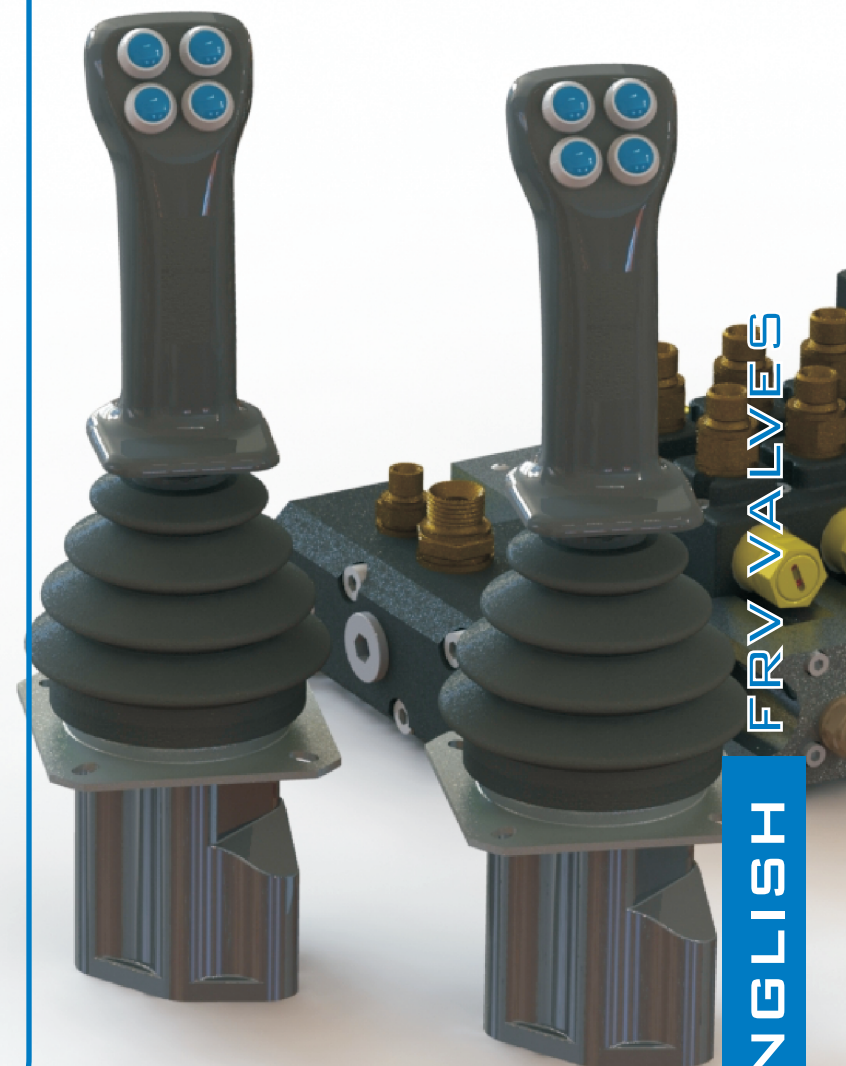

FRV VALVES

ENGLISH






A HYDRAULIC CONTROL VALVE,
LIGHT-WEIGHT AND SMALL IN
SIZE, PARTICULARLY USED AS
VALVES FOR AGRICULTURAL
LOADERS AND TIMBER.

AVAILABLE DIFFERENT
MECHANICAL, ELECTRICAL ON-
OFF AND HYDRAULIC SERVO
CONTROL.

get Your crane moving!

FRV 60 HYDRAULIC SERVO CONTROL

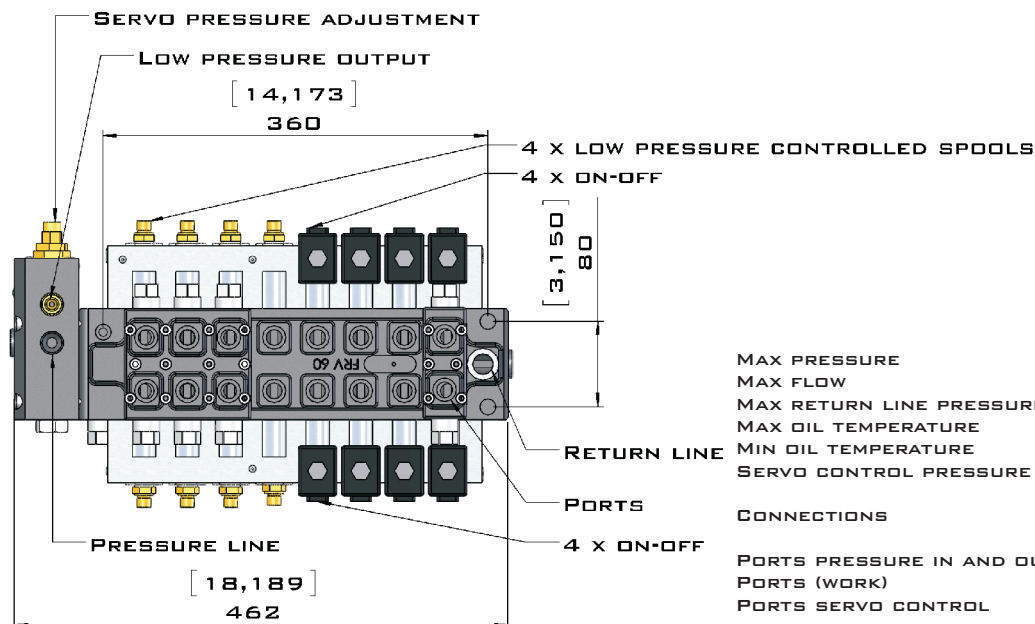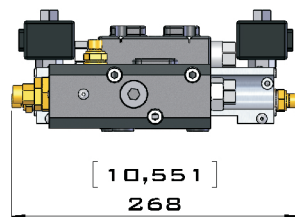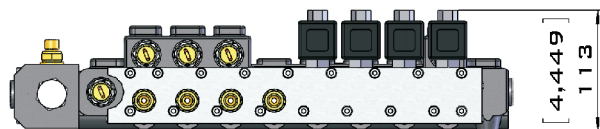

MAX PRESSURE	250 BAR
MAX FLOW	60 L/MIN
MAX RETURN LINE PRESSURE	10 BAR
MAX OIL TEMPERATURE	+60 C
MIN OIL TEMPERATURE	-20 C
SERVO CONTROL PRESSURE	25-35 BAR



CONNECTIONS

PORTS PRESSURE IN AND OUT	G1/2"
PORTS (WORK)	G3/8"
PORTS SERVO CONTROL	G1/4"

ELECTRICAL

12 VDC, 2.5 AMP
24 VDC (OPTIONAL)

CRV 104 JOYSTICK

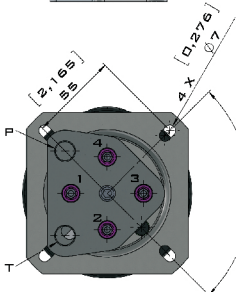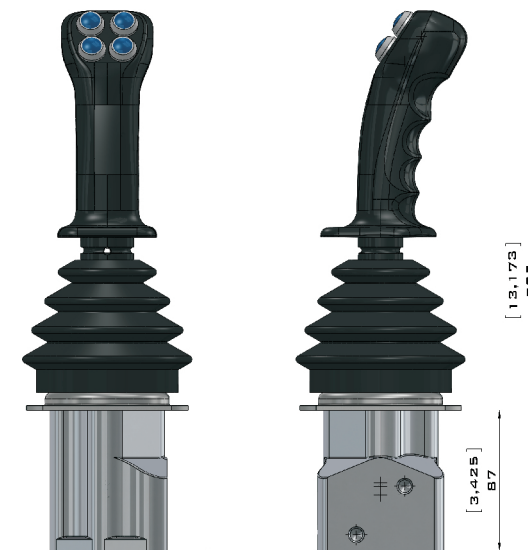

CONNECTIONS	PSB G1/4"
WEIGHT	1,9 KG
SWITCH	4 X ON-OFF
MAX PRESSURE	80 BAR



get Your crane moving!

WWW.FINN-ROTOR.COM
INFO@FINN-ROTOR.COM
+358 14 417 8400

PL 96,43101 SAARIJÄRVI
FINLAND