




<R> = Rotation, unlimited, max 250 bar.
 GO = Grapple open line, max 200 bar.
 GC = Grapple close line, max 300 bar

FINN ROTOR

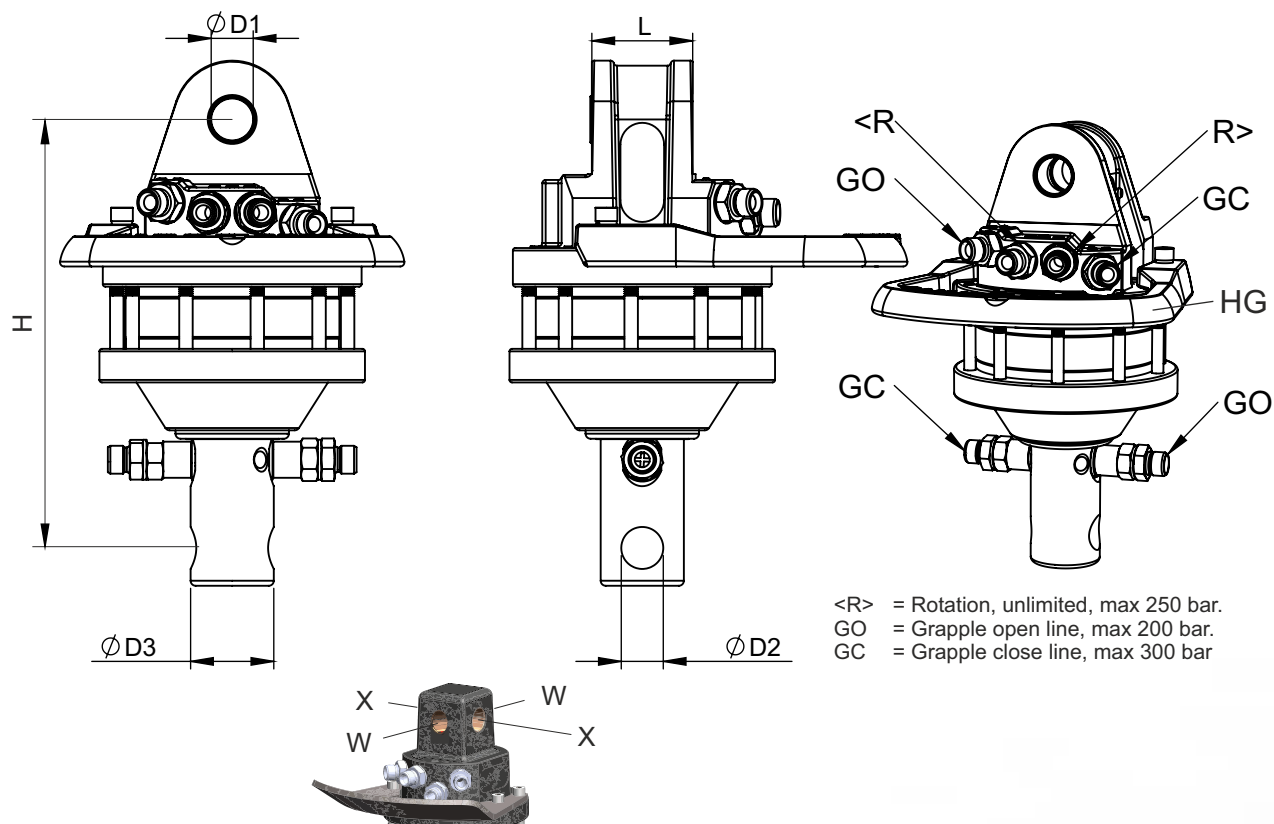

Code	Connectors*	Product	ØD1 mm	ØD2 mm	ØD3 mm	L mm	H mm	Nm	kN	kN	kg	TOP shape	HG
70100	-111	CR 100-W25A20	25	20	39.5	45	219.5	450	10	5	10		S
70101	-111	CR 100-W1"A20	1in	20	39.5	45	219.5	450	10	5	10		S
70300	-222	CR 300-W25A25	25	25	49.5	60	255	900	30	15	16		S
70301	-222	CR 300-W1"A1"	1in	1in	49.5	60	255	900	30	15	16		S
70304	-222	CR 304-W25A25	25	25	49.5	60	255	900	30	15	16		ST
70311	-222	FR 7c-W25A25	25	25	49.5	60	262.5	900	30	15	16		PL
70314	-222P	FR 7c-X24A24	24	24	49.5	60	262.5	900	30	15	16		PL
70320	-222P	CR 320-W25A25	25	25	49.5	60	262.5	900	30	15	16		S
70322	-222	CR 320-X25A25	25	25	49.5	60	262.5	900	30	15	16		S
70400	-222	CR 400-W25A30	25	30	59	73	273	1100	45	25	23		S
70401	-222	CR 400-W25A30(D68)	25	30	68	73	273	1100	45	25	24.5		S
70404	-222	CR 400S-W25A30	25	30	59	73	273	1100	45	25	23		ST
70410	-222	CR 410-W25A30	25	30	59	73	289	1100	45	25	23		PL
70415	-222P	FR 10c-X25A30	25	30	59	73	289	1100	45	25	23		PL
70416	-222	FR 10c-W25A30	25	30	59	73	289	1100	45	25	23		PL
70500	-222	CR 500-W30A30	30	30	69	73	284	1400	55	25	28		S

Pin hole direction: W=0, X= 90

Connectors:

1=BSP 1/4"

2=BSP 3/8"

3=BSP 1/2"

4=JIC 9/16-18

5=JIC 3/4-16

8=DIN M18x1,5

9=DIN M22x1,5

0=Plastig plug

S=Steel plug

*) "standard", other versions also available

HG


S = Standard, cast iron

ST = Casted steel

PL = Steel plate


SHAFT MODELS

ENGLISH CR A ROTATORS

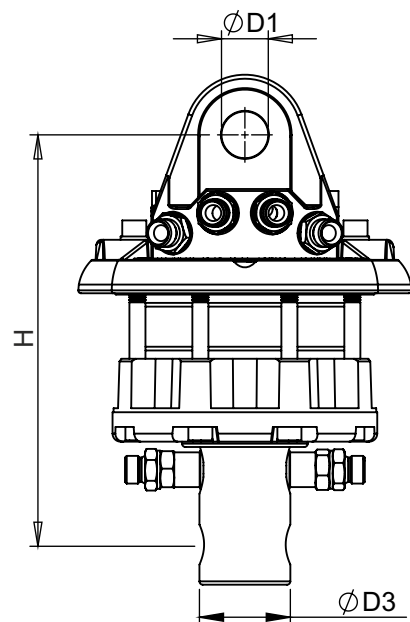


CR -SERIES

<R> = Rotation, unlimited, max 250 bar.
 GO = Grapple open line, max 200 bar.
 GC = Grapple close line, max 300 bar

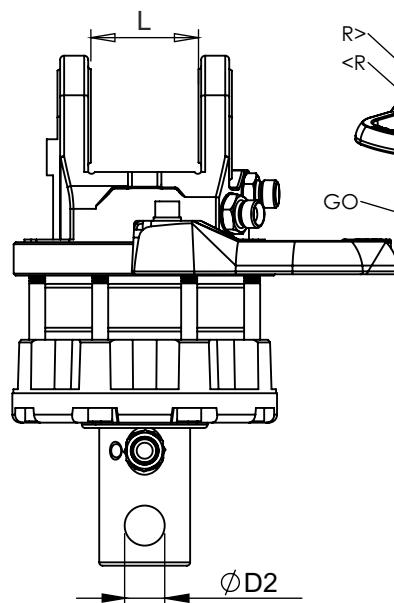

CRH -SERIES

<R> = Rotation, unlimited, max 250 bar.
 GO = Grapple open line, max 300 bar.
 GC = Grapple close line, max 300 bar

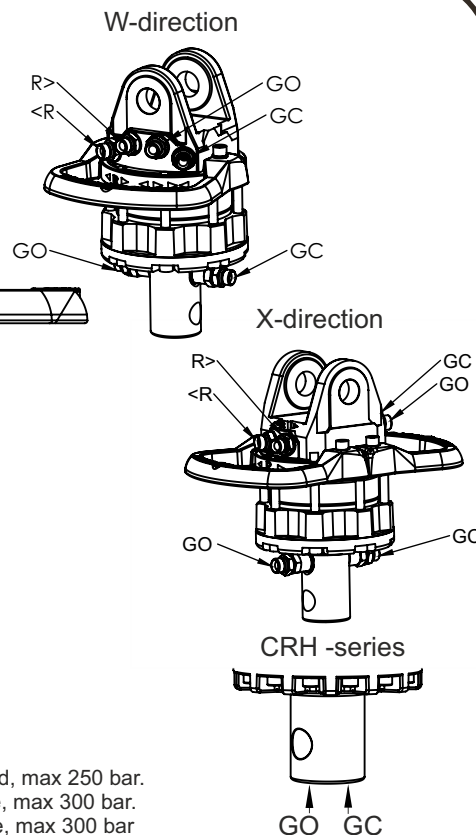

Code	Connectors*	Product	ØD1 mm	ØD2 mm	ØD3 mm	L mm	H mm	 Nm	 kN	 kN	 kg	 TOP shape	HG
70602	-333	CR 600-W35A35(D78)	35	35	78	80	310.5	1800	60	30	36		S
70602L	-333	CR 600L-W35A35(D78)	35	35	78	80	310.5	1800	60	30	38		L
70603	-333	CR 600-X35A35(D78)	35	35	78	80	310.5	1800	60	30	38		S
70604	-333	CR 600-X35A30(D68)	35	30	68	80	306,5	1800	60	30	37		S
70605	-333	CR 600-W35A30(D68)	35	30	68	80	306,5	1800	60	30	35		S
70605L	-333	CR 600L-W35A30(D78)	35	30	68	80	306,5	1800	60	30	37		L
71004	-333	CR 1000-W35A35(D78)	35	35	78	80	331	2700	100	50	50		S
71005	-333	CR 1000-X35A35(D78)	35	35	78	80	331	2700	100	50	52	S	
71203	-333	CRH 1200-X35A35(D88)	45	35	88	100	417	2900	120/ -60	90/ -45	73		S
71204	-333	CRH 1200-W35A35(D88)	45	35	88	100	417	2900	120/ -60	90/ -45	71		S

Shaft
 Upper cover GO/GC
 <R>

Upper cover model °

Connectors:
 1=BSP 1/4" 2=BSP 3/8" 3=BSP 1/2"
 4=JIC 9/16-18 5=JIC 3/4-16 8=DIN M18x1,5
 9=DIN M22x1,5 0=Plastig plug S=Steel plug
 *) "standard", other versions also available

HG
 S = Standard, cast iron
 ST = Casted steel
 PL = Steel plate
 L = High, steel

FINN ROTOR

CR-ROTATORS

Select a CR A series when you need the best productivity and power.

A light-weight and effective hydraulic rotators with unlimited rotation for ATV, agricultural and cargo cranes.

Choose genuine Finn-Rotor original accessories to ensure smooth working. From the wide variety, you will find all necessary accessories.

get Your crane moving!

FINN ROTOR

get Your crane moving!

www.finn-rotor.com
 info@finn-rotor.com
 +358 14 417 8400

PL 96, 43101 SAARIJÄRVI
 FINLAND